

# FLEXIBLE HEATERS

## STFX Teflon® Heater - modular system

### Flexible by design certified with flexible risers

Model STFX. Ratings 4500 - 15000 watts.

Voltage: 1 phase 230V or 3 phase 400V.

3-phase 230 voltage, please consult factory.

Important and valuable feature.

The heating elements are individually replaceable.


In case of failure, you only need to replace the failed heating element, not the entire heater.

Option overheat protection  
Option bottom bended

### Standard sizes

3 phase 400 Volts

	A	B	Th.	Hes
				Watt/cm <sup>2</sup>
4,5KW	335	340	50	1,5
4,5KW	400	280	50	1,5
4,5KW	460	255	50	1,5
4,5KW	530	230	50	1,5
4,5KW	625	215	50	1,5
4,5KW	1030	150	50	1,5
6KW	320	420	50	1,5
6KW	410	325	50	1,5
6KW	535	270	50	1,5
6KW	640	240	50	1,5
6KW	680	225	50	1,5
6KW	880	195	50	1,5
6KW	1050	160	50	1,5
7,4KW	320	420	50	2,0
7,4KW	410	325	50	2,0
7,4KW	535	270	50	2,0
7,4KW	640	240	50	2,0
7,4KW	680	225	50	2,0
7,4KW	880	195	50	2,0
7,4KW	1050	160	50	2,0
9KW	320	420	75	1,5
9KW	410	325	75	1,5
9KW	535	270	75	1,5
9KW	640	240	75	1,5
9KW	680	225	75	1,5
9KW	880	195	75	1,5
9KW	1050	160	75	1,5
11KW	320	420	75	2,0
11KW	410	325	75	2,0
11KW	535	270	75	2,0
11KW	640	240	75	2,0
11KW	680	225	75	2,0
11KW	880	195	75	2,0
11KW	1050	160	75	2,0
12KW	320	810	50	1,5
12KW	420	650	50	1,5
12KW	550	530	50	1,5
12KW	640	480	50	1,5
12KW	700	430	50	1,5
12KW	860	380	50	1,5
12KW	1050	310	50	1,5
12KW	1400	280	50	1,5
15KW	320	810	50	2,0
15KW	420	650	50	2,0
15KW	550	530	50	2,0
15KW	640	480	50	2,0
15KW	700	430	50	2,0
15KW	860	380	50	2,0
15KW	1050	310	50	2,0
15KW	1400	280	50	2,0

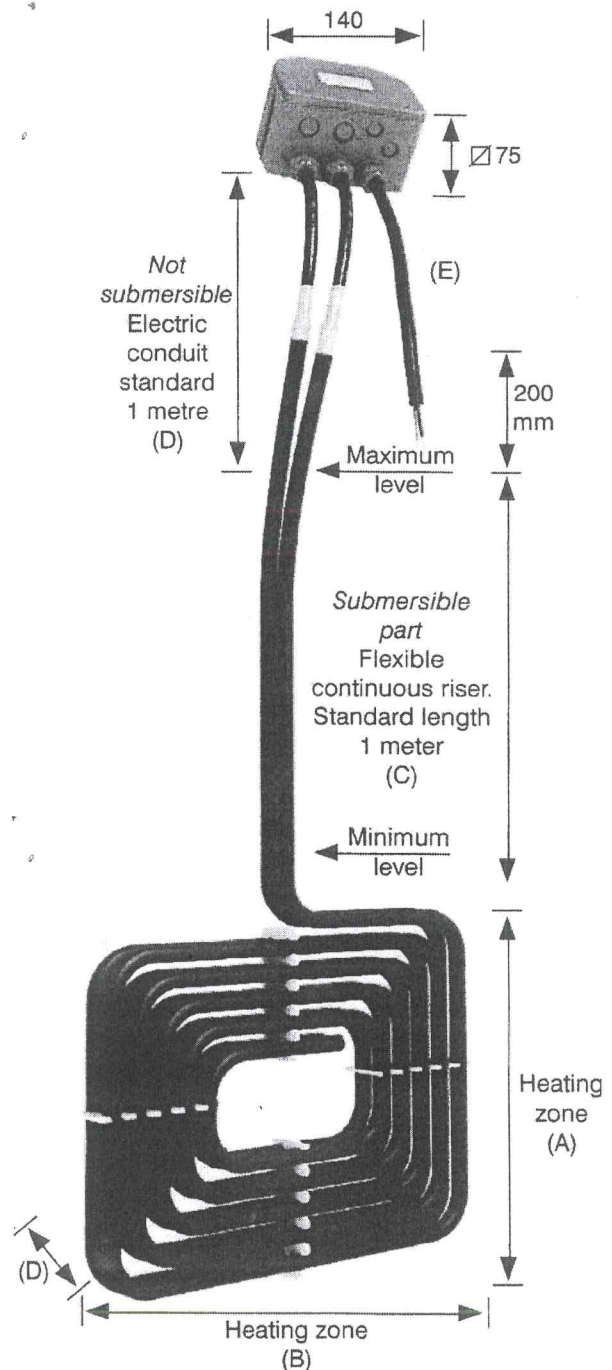

\* Teflon is the DuPont™ trade name for PTFE.