

Cilindri a Cartuccia | Cartridge Cylinders


I cilindri a Cartuccia a semplice effetto sono stati progettati per l'utilizzo in piccoli spazi. La filettatura esterna permette un facile montaggio. Versioni disponibili :

Funzionamento: Stelo filettato
 Stelo non filettato
Alesaggio: 6 - 10 - 16
Corsa: 5 - 10 - 15

The single-acting cartridge cylinders have been studied and designed to be used in reduced spaces. The external thread ensures an easy assembly.

They are available in two versions:

Functioning: Threaded piston rod
 No-threaded piston rod
Bore size: 6 - 10 - 16
Strokes: 5 - 10 - 15

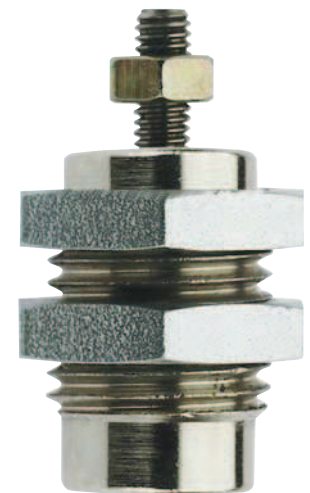

Caratteristiche Tecniche | Technical Characteristics

Pressione D'esercizio: Min. 2 BAR - Max. 7 BAR
Temperatura D'esercizio: Min. 0°C (-20°C Con aria secca) - Max. +80°C
Fluido: Aria compressa filtrata lubrificata e non lubrificata

Working pressure: Min. 2 BAR - Max. 7 BAR
Working temperature: Min. 0°C (-20°C with dry air) - Max. +80°C
Fluids: Filtered and lubricated compressed air as well as non lubricated air